

Art. 261



Hinged Pipe Clamp W/ Lining, Classic Type (III)

Advantages/Benefits

- Suitable for fixing of drinking and heating water pipe lines.
- **Economy type designed by cost saving material system.**
- Snap tongue can freely swing by very wide angle.
- Hinged pipe clamp can open wide for easy insertion of the pipe.
- Secure stop points on top of the screw prevent the screw from falling down during the installation works.
- Time and energy saving insertion of the pipe in overhead installation.
- Strong sound insulation insert for firm fit.

Technical Data

- Material: Steel 1.0332 acc. to DIN EN 10111
- Zinc plating: Electro zinc plated, 8–12 µm
- Sound absorption lining: EPDM; chlorine-free; silicone-free
- Noise reduction: According to DIN 4109
- Temperature resistance: –50°C to +110°C
- EPDM hardness: 45° +/- 5° Shore-A
- Fire behaviour: Class B2 according to DIN 4102

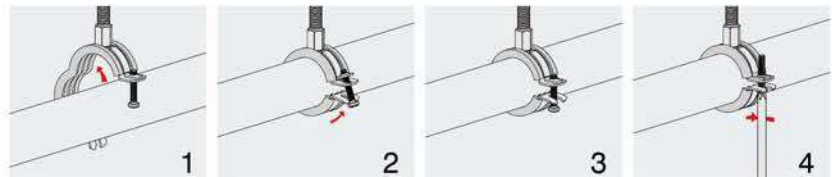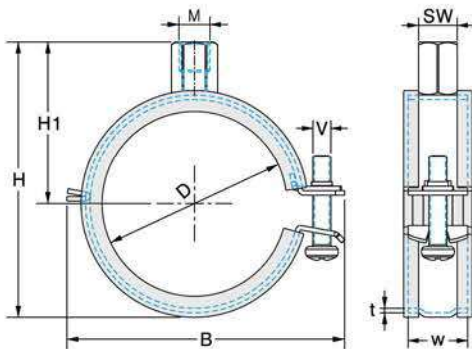

Article Number	Clamping Range		Connecting Thread	Dimensions [mm]						Pack Size [pcs]	Max. Rec. Load [N]
	D[mm]	[inch]		w x t	B	H	H1	SW	V		
1218 261 012	12-14	1/4	M8/M10	20x1.5	46	43	30	13	M5x25	150	1200
1218 261 015	15-19	3/8	M8/M10	20x1.5	50	48	32	13	M5x25	150	1200
1218 261 021	21-23	1/2	M8/M10	20x1.5	55	52	34	13	M5x25	100	1200
1218 261 026	26-28	3/4	M8/M10	20x1.5	60	57	37	13	M5x25	100	1200
1218 261 032	32-35	1	M8/M10	20x1.5	67	64	40	13	M5x25	100	1200
1218 261 040	40-43	1-1/4	M8/M10	20x1.5	75	72	44	13	M5x25	50	1200
1218 261 048	48-51	1-1/2	M8/M10	20x1.5	84	80	48	13	M5x30	50	1200
1218 261 052	52-56	2	M8/M10	20x1.5	91	85	51	13	M5x30	50	1200
1218 261 057	57-61	–	M8/M10	20x1.5	93	90	53	13	M5x30	50	1200
1218 261 063	63-67	–	M8/M10	20x1.5	99	96	56	13	M5x30	50	1200
1218 261 074	74-80	2-1/2	M8/M10	20x1.5	112	109	63	13	M5x30	50	1200
1218 261 083	83-91	3	M8/M10	20x1.5	123	120	68	13	M5x30	50	1200
1218 261 100	100-105	–	M8/M10	23x2.0	141	135	76	13	M6x35	25	1800
1218 261 108	108-114	4	M8/M10	23x2.0	150	144	80	13	M6x35	25	1800