

Art. 272



Two Screws Pipe Clamp W/ Lining, **EZLock™** Type (II)

Advantages/Benefits

- **Aimcofix patented model.**
- Suitable for fixing of drinking and heating water pipe lines.
- Snap closure with **special "click-function"** to prevent lower half part of clamp from falling upper half part during the installation.
- **Special designed "round stop-edge" to secure the screw in safety lock position without sliding out after the screw fastened.**
- Wide opening of the clamp due to the swivelling ability of the lower clamp half.
- Strong sound insulation insert for firm fit.

Technical Data

- Material: Steel 1.0332 acc. to DIN EN 10111
- Zinc plating: Electro zinc plated, 8–12 µm
- Sound absorption lining: EPDM; chlorine-free; silicone-free
- Noise reduction: According to DIN 4109
- Temperature resistance: –50°C to +110°C
- EPDM hardness: 45° +/- 5° Shore-A
- Fire behaviour: Class B2 according to DIN 4102

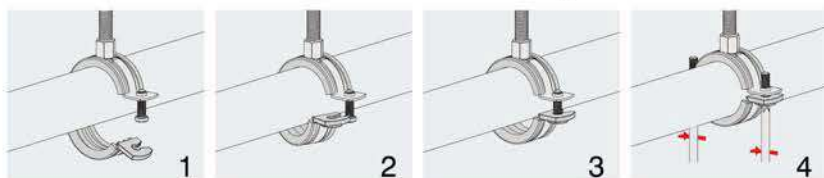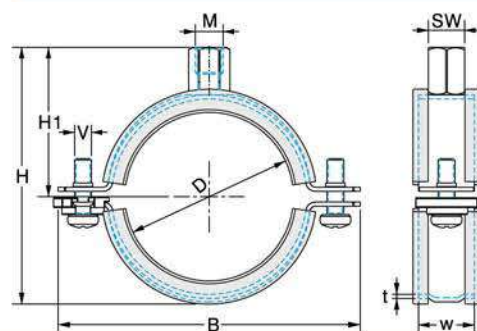

Article Number	Clamping Range		Connecting Thread	Dimensions [mm]						Pack Size [pcs]	Max. Rec. Load [N]
	D[mm]	[inch]		w x t	B	H	H1	SW	V		
1218 272 012	12-14	1/4	M8	20x1.2	56	33	20	13	M5x16	150	1000
1218 272 015	15-19	3/8	M8	20x1.2	61	37	22	13	M5x16	150	1000
1218 272 020	20-23	1/2	M8	20x1.2	65	41	24	13	M5x16	100	1000
1218 272 025	25-28	3/4	M8	20x1.2	71	46	27	13	M5x16	100	1000
1218 272 032	32-35	1	M8	20x1.2	78	53	30	13	M5x16	100	1000
1218 272 040	40-43	1-1/4	M8	20x1.2	86	62	35	13	M5x20	50	1000
1218 272 044	44-49	1-1/2	M8	20x1.2	92	68	38	13	M5x20	50	1000
1218 272 050	50-56	–	M8/M10	20x1.5	103	87	52	13	M6x20	50	1200
1218 272 057	57-61	2	M8/M10	20x1.5	108	92	54	13	M6x20	50	1200
1218 272 063	63-67	–	M8/M10	20x1.5	114	98	57	13	M6x20	50	1200
1218 272 070	70-73	–	M8/M10	20x1.5	121	104	60	13	M6x20	50	1200
1218 272 074	74-80	2-1/2	M8/M10	20x1.5	127	111	64	13	M6x20	50	1200
1218 272 083	83-91	3	M8/M10	20x1.5	138	122	69	13	M6x20	50	1200
1218 272 101	101-106	–	M8/M10	25x2.0	162	140	78	13	M8x25	25	2100
1218 272 108	108-114	4	M8/M10	25x2.0	170	148	82	13	M8x25	25	2100
1218 272 125	125	–	M8/M10	25x2.0	182	159	88	13	M8x25	25	2100
1218 272 131	131-135	–	M8/M10	25x2.0	192	169	93	13	M8x25	25	2100
1218 272 136	136-139	–	M8/M10	25x2.0	196	173	95	13	M8x25	25	2100
1218 272 140	140-144	5	M8/M10	25x2.0	201	178	97	13	M8x25	25	2100
1218 272 159	159-163	–	M8/M10	25x2.0	220	197	107	13	M8x25	20	2100
1218 272 165	165-169	6	M8/M10	25x2.0	226	203	110	13	M8x25	20	2100
1218 272 193	193-200	–	M8/M10	25x3.0	257	236	127	17	M8X30	10	2800
1218 272 210	210-212	–	M8/M10	25x3.0	269	248	133	17	M8X30	10	2800
1218 272 216	216-220	8	M8/M10	25x3.0	277	256	137	17	M8X30	10	2800